
Position pieces · Prep

Full guide


1 Find the cut line

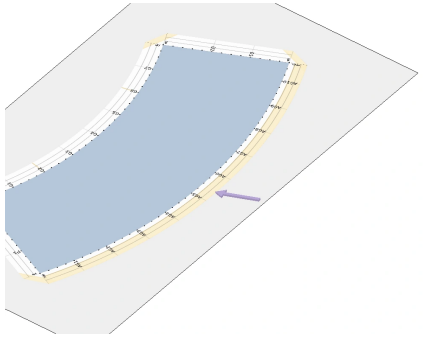

Step help

Find the outermost solid black line. The arrow points to the cut line; keep the seam allowance inside it.

2 Cut along the line

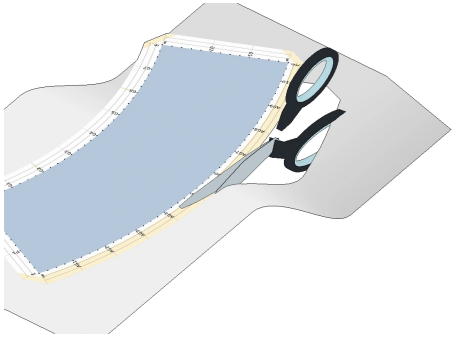


Step help

Cut on the outermost solid black line with the fabric scissors.

Position pieces · Prep

3 Lift out the cut piece

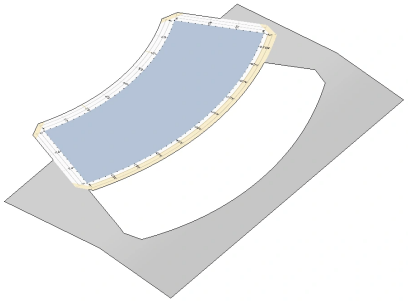


Step help

Remove the surrounding cloth. Keep the full marked seam allowance attached.

Position pieces


1 Turn printed sides together

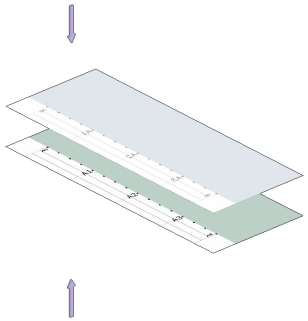

Step help

Place the printed sides of the pieces together.

2 Align the matching seam

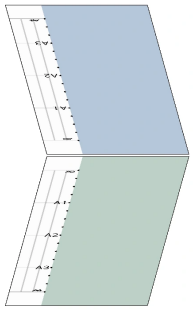


Step help

Align the pieces so that the start point on each edge align. If possible, roughly align the matching dots on the rest of the edge.

3 Check left and right

L

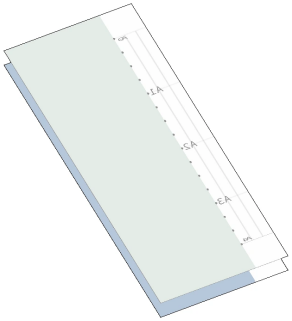


R

Step help

Orient the stack of pieces so that the seam allowance faces your right, and the start of the edge is further away from you.

Position pieces · Tips

1 Tips 1

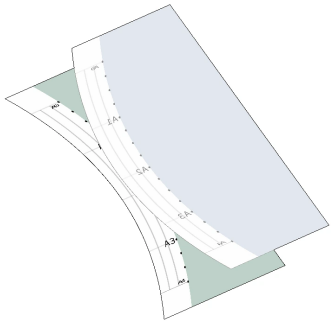

Step help

If the seam is curved in different directions, alignment will be hard. Do not worry -- basting in the next step will force them into alignment.